

## SPEED CONTROL FOR COMPRESSORS

5 The present invention concerns some improvements to compressors.

In particular, the present invention concerns a compressor for compressing gases of the type comprising at least one  
10 compressor element with a gas outlet and a gas inlet, as well as a sensor to determine the outlet temperature in the gas outlet, a sensor to determine the rotational speed of the compressor element, a motor with an electronically adjustable speed driving this compressor element, and  
15 finally a control device for said motor.

It is known that such compressors can operate within a specific maximum speed range of the number of revolutions, between a maximum and a minimum number of revolutions which  
20 depends among others on the mechanical limitations of the rotating parts, whereby irrevocable damage can be caused to the compressor in case the number of revolutions exceeds said speed range.

25 The speed range is usually characterised by the ratio between the maximum number of revolutions and the minimum number of revolutions, whereby the value of this ratio is typically situated around 3.2.

30 It is also known that a further restriction of the speed range is imposed by a phenomenon caused by a drastic output

reduction of a compressor in the high and low speed range, as a result of which, as the rotational speed of the compressor comes closer to the aforesaid maximum or minimum number of revolutions, the temperature of the compressed gas can raise to such an extent that the coatings of the compressor element and of the downstream parts of the compressor may be damaged by the heat. In practice, this occurs when the temperature on the outlet of the compressor element exceeds an admitted maximum critical threshold value of 260 to 265°C.

In order to restrict the influence of the output reduction and to prevent the temperature on the outlet of the compressor element from rising above the aforesaid threshold value, it is important to further restrict the above-mentioned admitted speed range, all the more when the circumstances having an influence on the temperature rise are more adverse, namely in case of high ambient temperatures, when the finishing quality of a new compressor is not so good, in case of increasing wear of a used compressor and the like.

Compressors of the above-mentioned type are already known which are equipped with a fixed speed limiter, in particular a speed limiter with a fixed minimum and maximum threshold value for the rotational speed, whereby the most adverse circumstances are taken as a basis to determine said fixed threshold values, namely for a compressor with a minimum production quality, a certain degree of wear and operating at a maximum admitted ambient temperature.

A disadvantage of such known compressors with a fixed speed limiter is that the set speed range which is determined on the basis of a worst case scenario, assuming the most adverse circumstances, is in fact too restricting for  
5 circumstances which are less adverse, such as for example in case of lower temperatures, allowing in principle for a higher speed range without exceeding the aforesaid critical threshold value of the temperature on the outlet of the compressor element. This implies that the capacity of such  
10 a compressor cannot be used to the full as far as the delivered gas flow is concerned in circumstances which deviate from the aforesaid worst case scenario.

In practice, such known compressors have a speed range with  
15 a maximum/minimum rotational speed ratio in the order of magnitude of 2.4, whereas, under favourable conditions, a speed range of 3.2 would be possible.

The present invention aims to remedy the above-mentioned  
20 and other disadvantages by providing a compressor with a dynamic speed limiter which automatically maximizes the speed range of the compressor as a function of the operational circumstances, irrespective of the state and condition the compressor is in.

25 To this aim, the invention concerns an improvement to a compressor of the above-mentioned type which consists in that the compressor is provided with a dynamic speed limiter with what is called a hysteresis module, coupled to  
30 the above-mentioned control device of the motor and to the above-mentioned sensors for the outlet temperature and the

rotational speed, whereby a hysteresis upper temperature limit has been defined in this hysteresis module, as well as an admitted maximum speed range which is determined by a minimum rotational speed and a maximum rotational speed and  
5 whereby, as soon as the measured outlet temperature reaches the specified hysteresis upper temperature limit, the actual rotational speed of the compressor element is either lowered with a speed jump DS when the measured rotational speed is situated in the high speed range close to the  
10 maximum rotational speed, or is increased with a speed jump DS when the measured rotational speed is situated in the low speed range close to the minimum rotational speed.

Thanks to the dynamic speed limiter according to the  
15 invention, when the aforesaid hysteresis upper temperature limit is reached, which preferably is somewhat lower, for example 2°C lower than the admitted maximum critical threshold value of the outlet temperature, the rotational speed will automatically be adjusted in the right sense in  
20 order to make the outlet temperature decrease.

In this manner, the speed restriction is not determined by a worst case scenario, but under certain favourable circumstances, for example in case of low ambient  
25 temperatures, the rotational speed of the compressor will cover the entire speed range which is determined by the limitations of the rotating parts, such that the entire available capacity of the compressor as far as the gas output is concerned can be used completely. Should the  
30 circumstances become worse, for example when the ambient temperature rises, the speed range is automatically

adjusted as soon as the outlet temperature reaches the aforesaid critical threshold value, such that this threshold value can never be exceeded, not even in case of increasing wear of the compressor.

5

In the hysteresis module is preferably also defined a hysteresis lower temperature limit whereby, as soon as the measured outlet temperature reaches the specified hysteresis lower temperature limit, the entire aforesaid  
10 admitted maximum speed range becomes available again.

This offers the advantage that when the operational conditions of the compressor become more favourable, as a result of which the temperature on the outlet of the  
15 compressor element decreases, the capacity of the compressor can be used to the full again.

The invention also concerns a method for compressing a gas whereby a compressor according to the invention is applied.  
20 As the operation of the compressor is optimized, there will be less unwanted failures of the compressor.

In order to better explain the characteristics of the invention, the following preferred embodiment of the  
25 invention is described as an example only without being limitative in any way, with reference to the accompanying drawings, in which:

figure 1 represents the outlet temperature of a  
30 conventional compressor as a function of the rotational speed of the compressor;

figure 2 represents the outlet temperature of a conventional compressor in the highest speed range of the compressor;

figure 3 represents a module of a speed regulation according to the invention.

Figure 1 shows the temperature curve  $T_O$  of the compressed gas on the outlet of the compressor element of a conventional compressor as a function of the number of revolutions  $S$  of the compressor, such for an admitted maximum speed range which is limited by an admitted minimum rotational speed  $SMIN$  and an admitted maximum rotational speed  $SMAX$ , whereby  $SMIN$  and  $SMAX$  are determined among others by the limits of the rotating parts.

Figure 1 shows three outlet temperature curves,  $F1$ ,  $F2$  and  $F3$  respectively, represented for three different ambient temperatures, namely a low temperature  $T1$ , a higher temperature  $T2$  and a still higher temperature  $T3$ .

As can be clearly derived from this figure 1, each curve  $F1$ - $F2$ - $F3$  has an almost flat middle part 1 with an almost constant outlet temperature for an ambient temperature that remains the same and two steeper parts, a part 2 in the high speed range of the compressor close to  $SMAX$  and a part 3 in the lower speed range close to  $SMIN$  respectively.

The parts 2 and 3 clearly illustrate the phenomenon whereby the compressor output strongly decreases and, consequently, the outlet temperature  $T_O$  strongly increases, when the

number of revolutions in the high speed range increases, decreases in the low speed range respectively.

The above-mentioned curves F1-F2-F3 are also a function of  
5 other parameters, such as among others the operational pressure, the finishing degree of a new compressor, the wear of a used compressor, whereby the curves shift upward for a compressor with a finishing that is less good or for a compressor which is more worn.

10

In order to keep the argumentation simple, we will assume hereafter that the latter parameters remain constant.

In figure 1 is also indicated the critical threshold value  
15 TMAX of the outlet temperature TO above which the compressor must be stopped in order to prevent the coatings on the compressor element and on the downstream parts of the compressor to become damaged due to the excessive heat of the compressed gases.

20

It is clear that, because of this temperature threshold TMAX, the admitted speed range of the compressor at an ambient temperature T1 is limited by a lower threshold value OG1 and an upper threshold value BG1. For the higher  
25 temperatures T2 and T3, the admitted speed range of the compressor is smaller and will be situated between OG2 and OG3 respectively, and between BG2 and BG3 respectively.

With the known compressors, the most adverse situation at  
30 the highest admitted ambient temperature T3 is taken as a basis to determine the fixed speed range, and the fixed

speed range is set between the corresponding lower and higher threshold values OG3 and BG3.

As opposed to such a conventional compressor with a fixed speed range OG3-BG3, a compressor according to the invention is provided with a dynamic speed limiter comprising a hysteresis module in which a hysteresis upper temperature limit HMAX is defined which is preferably 2°C lower than TMAX and whereby, as soon as the measured outlet temperature TO reaches the specified hysteresis upper temperature limit, the actual rotational speed of the compressor element is either lowered with an adjustable speed jump DS when the measured rotational speed is situated in the higher speed range, or is increased with a speed jump DS when the measured rotational speed is situated in the lower speed range.

The working principle of a compressor with a dynamic speed limiter according to the invention is simple and will be illustrated hereafter by means of figure 2 representing a number of outlet temperature curves in the higher speed range of the compressor, such at different temperatures between 32°C and 40°C.

If, for example, starting from a situation A at an ambient temperature of 34°C and a number of revolutions SA, the ambient temperature gradually rises to 39°C, the number of revolutions of the compressor will first remain unchanged, and the outlet temperature TO will gradually rise up to the point where the operational point B reaches the hysteresis upper temperature limit HMAX and the hysteresis module



instantly reduces the number of revolutions of the compressor according to the invention with a speed jump DS, as a result of which the operational point is immediately shifted to a point C, after which, when the ambient  
5 temperature rises still further, the outlet temperature will rise again at a constant number of revolutions SC until the upper temperature limit HMAX is reached again in point D and the hysteresis module applies an additional speed adjustment with a jump DS, such that the operational  
10 point immediately shifts to point E and afterwards, when the temperature rises still further to 39°C, will move further to point F on the curve F39 at a constant rotational speed SE.

15 It is clear that the threshold value TMAX of the outlet temperature will never be reached in this case, and that the speed limits are automatically adjusted to less favourable circumstances, such as for example a higher ambient temperature, such that the speed limits must not be  
20 unnecessarily restricted, as is the case with conventional compressors, to a much smaller speed range, dictated by a hypothetical worst case situation.

According to the invention, also a hysteresis lower  
25 temperature limit HMIN is defined in the hysteresis module whereby, as soon as the measured outlet temperature TO reaches this lower temperature limit HMIN, the actual rotational speed of the compressor element is either increased when the measured rotational speed is situated in  
30 the highest speed range, or it is lowered when the measured rotational speed is situated in the lowest speed range.

The hysteresis module will preferably be configured such that, as soon as the measured outlet temperature TO reaches the hysteresis lower temperature limit HMIN, the entire  
5 above-mentioned admitted maximum speed range between SMIN and SMAX becomes available again.

If, starting from the preceding operational point F, the ambient temperature decreases to for example 32°C, the  
10 number of revolutions SE will at first remain constant and the outlet temperature TO will drop until HMIN is reached, and the hysteresis module will make an upward adjustment of the rotational speed of the compressor according to the invention until the admitted maximum number of revolutions  
15 SMAX and thus a maximum delivery is reached in the operational point H on the curve F32, or until the upper temperature limit HMAX is reached should this occur any sooner.

20 A similar regulation principle occurs in the lowest speed range of the compressor close to the minimum rotational speed SMIN, whereby the speed is now each time increased with a speed jump DS when the hysteresis upper temperature limit HMAX is reached. This means that the delivery  
25 pressure of the compressor will rise up to an automatic idle condition and possibly to an automatic stop/restart mode of the compressor, without switching to an unwanted stop mode with alarm and manual re-start. In other words, the speed at which the compressor runs idle is adjusted as  
30 a function of the ambient temperature and the condition of the compressor.

The above-mentioned speed jump DS is preferably set such that a resulting decrease of the outlet temperature TO is always smaller than the difference between the hysteresis upper temperature limit HMAX and the hysteresis lower temperature limit HMIN in order to avoid cyclic instable behaviour of the rotational speed of the compressor.

The outlet temperature TO is measured at a certain frequency, for example once in a minute.

In case of a sudden rise of the ambient temperature, this measuring frequency may be too low in order to be able to adjust the speed range sufficiently fast. That is why, when the measured outlet temperature TO is still higher than the hysteresis upper temperature limit HMAX after a speed adjustment with a jump DS, the measuring frequency will be raised, such that the hysteresis module can react faster and possibly with several successive jumps DS until the outlet temperature drops below HMAX.

The dynamic speed limiter is preferably provided with safety devices, for example in order to prevent that the speed exceeds an admitted maximum speed SMAX and/or in order to prevent that the speed drops below an admitted minimum speed SMIN and/or in order to prevent that the admitted maximum temperature is exceeded during a certain time, etc.

The dynamic speed limiter is preferably programmed in order to obtain an almost optimal operation of the compressor

with a speed range larger than 2.5, preferably between 2.7 and 3.5, and it can be adjusted such that at least the admitted maximum temperature can be set, preferably between 150°C and 350°C, better still between 200°C and 300°C.

5

Figure 3 schematically shows a dynamic speed limiter according to the invention.

This speed limiter comprises:

- 10     - a means 10 for receiving a signal from the temperature sensor;
- a means 11 for receiving a signal from the rotational speed sensor of the compressor;
- a control device 12 for regulating the speed of the  
15     motor which drives the rotating element of the compressor, for example as a function of the load of the compressor element, within a specified maximum speed range (SMIN-SMAX), determined by limitations on the rotating parts;
- 20     - a hysteresis module 13 for adjusting the speed as a function of the signals (outlet temperature T<sub>O</sub> and number of revolutions S) of the means 10 and the means 11, whereby this hysteresis module 13 may have a memory with possibly a number of outlet temperature  
25     curves and/or whereby this hysteresis module 13 may be programmed in the control device 12;
- a safety means 14 to stop the compressor, for example as soon as the outlet temperature T<sub>O</sub> exceeds a maximum temperature;
- 30     - a memory 15 for a minimum speed, whereby this minimum speed is used as the initial speed to set the

compressor back to work after it has run idle, and  
whereby this minimum speed corresponds to the minimum  
speed after the last speed adjustment by the  
hysteresis module 13 in the lower rotational speed  
5 range of the compressor or with a minimum speed of  
1500 to 2000 revolutions per minute (the minimum speed  
may also be a speed which is higher than the latter  
minimum speed, for example which is 10 to 30% higher  
than the latter minimum speed, with a minimum of 1750  
10 revolutions per minute). The memory also contains the  
speed values which define the lower, higher speed zone  
respectively (SMIN - K and L - SMAX) where the dynamic  
speed adjustment applies. In the intermediate speed  
zone, the control does not apply. As soon as the  
15 outlet temperature TO reaches the HMAX value is  
determined in what speed zone the actual speed is  
situated, in order to thus implement the required  
speed adjustment, i.e. a speed increase, a speed  
decrease respectively, depending on whether the speed  
20 is situated in the lower speed zone (SMIN - K), the  
higher speed zone (L - SMAX) respectively.

Claims.

- 5 1. Improvements to compressors which are at least provided with a compressor element with a gas inlet and a gas outlet, a sensor to determine the outlet temperature (TO) in the gas outlet, a sensor to determine the rotational speed (S) of the compressor element, a motor with  
10 adjustable speed, and a control device (12) for this motor, characterised in that the compressor is provided with a dynamic speed limiter which comprises what is called a hysteresis module (13), coupled to the above-mentioned control device (12) and to the above-mentioned sensors for  
15 the outlet temperature (TO) and the rotational speed (S), whereby a hysteresis upper temperature limit (HMAX) has been defined in this hysteresis module, as well as an admitted maximum speed range which is determined by a minimum rotational speed (SMIN) and a maximum rotational  
20 speed (SMAX) and whereby, as soon as the measured outlet temperature (TO) reaches the specified hysteresis upper temperature limit (HMAX), the actual rotational speed of the compressor element is either lowered with a speed jump (DS) when the measured rotational speed is situated in the  
25 high speed range close to the maximum rotational speed (SMAX), or is increased with a speed jump (DS) when the measured rotational speed is situated in the low speed range close to the minimum rotational speed (SMIN).
- 30 2. Improvements to compressors according to claim 1, characterised in that the hysteresis upper temperature

limit (HMAX) is somewhat lower than the maximum admitted critical threshold value (TMAX) of the outlet temperature (TO) above which the compressor will be damaged, in particular is less than 20°C lower than said critical  
5 threshold value (TMAX).

3. Improvements to compressors according to claim 1 or 2, characterised in that a hysteresis lower temperature limit (HMIN) has been defined in the hysteresis module (13),  
10 whereby, as soon as the measured outlet temperature (TO) reaches the specified hysteresis lower temperature limit (HMIN), the actual rotational speed of the compressor element is either raised when the measured rotational speed is situated in the highest speed range close to the  
15 critical maximum rotational speed (SMAX), or is lowered when the measured rotational speed is situated in the lowest speed range close to the critical minimum rotational speed (SMIN).

20 4. Improvements to compressors according to claim 3, characterised in that the hysteresis module (13) is configured such that, as soon as the measured outlet temperature (TO) reaches the hysteresis lower temperature limit (HMIN), the entire aforesaid admitted maximum speed  
25 range (SMAX-SMIN) becomes available again.

5. Improvements to compressors according to claim 1, characterised in that the speed jump (DS) can be adjusted when the hysteresis upper temperature limit (HMAX) is  
30 reached.

6. Improvements to compressors according to any of claims 3 to 5, characterised in that the above-mentioned speed jump (DS) can be adjusted such that a resulting decrease of the outlet temperature (TO) is always smaller than the difference between the hysteresis upper temperature limit (HMAX) and the hysteresis lower temperature limit (HMIN) in order to avoid cyclic instable behaviour of the rotational speed of the compressor.
7. Improvements to compressors according to claim 1, characterised in that the hysteresis module is configured such that the outlet temperature (TO) is measured with a certain periodicity, namely at least once per minute, and preferably continuously.
8. Improvements to compressors according to claim 7, characterised in that the hysteresis module is configured such that the periodicity of the measurements of the outlet temperature (TO) is increased as soon as the outlet temperature (TO) exceeds the hysteresis upper temperature limit.
9. Improvements to compressors according to claim 3, characterised in that an increase of the rotational speed resulting from the hysteresis upper temperature limit (HMAX) being reached in the lower speed range of the compressor results in an increase of the operational pressure which will lead to an automatic idle condition and possibly to an automatic stop/restart mode of the compressor, without switching to an unwanted stop mode with alarm and manual re-start.



10. Improvements to compressors according to any of the preceding claims, characterised in that the above-mentioned control device for the motor is provided with at least one  
5 safety device in order to prevent extreme conditions (SMAX).

11. Improvements to compressors according to any of the preceding claims, characterised in that the dynamic speed  
10 limiter is programmed in order to obtain an almost optimal operation of the compressor with a speed range larger than 2.5, preferably between 2.7 and 3.5.

12. Improvements to compressors according to any of the preceding claims, characterised in that the dynamic speed  
15 limiter can be adjusted such that at least the admitted maximum temperature can be set, preferably between 150°C and 350°C, better still between 200°C and 300°C.

20 13. Method for compressing gas by means of a compressor showing improvements according to any of the preceding claims.

14. Dynamic speed limiter or hysteresis module (13)  
25 belonging to it as described in any of claims 1 to 12 included.

15. Dynamic speed limiter which is suitable for a dynamic regulation of a compressor according to any of claims 1 to  
30 12 included, whereby the speed limiter comprises a hysteresis module 13 with a memory for possible outlet

temperature curves representing the outlet temperature TO as a function of the rotational speed (S) and whereby a hysteresis upper and lower temperature limit (HMIN and HMAX) have been set in the hysteresis module (13), as well  
5 as a speed jump (DS) for the rotational speed (S), either or not adjustable, when the above-mentioned upper and/or lower temperature limit (HMIN, HMAX) is reached.

16. Dynamic speed limiter according to claim 15,  
10 characterised in that it comprises a memory to determine whether the rotational speed (5) of the compressor is situated in the lower speed range (SMIN - K), or in the higher speed range (L - SMAX) in order to thus realise the correct speed adjustment, a speed increase or a speed drop  
15 respectively, when the upper temperature limit (HMAX) is reached.

17. Dynamic speed limiter according to claim 15 or 16,  
characterised in that it comprises a memory (15) to carry  
20 out an automatic re-start at the same speed as when the compressor was running idle before.

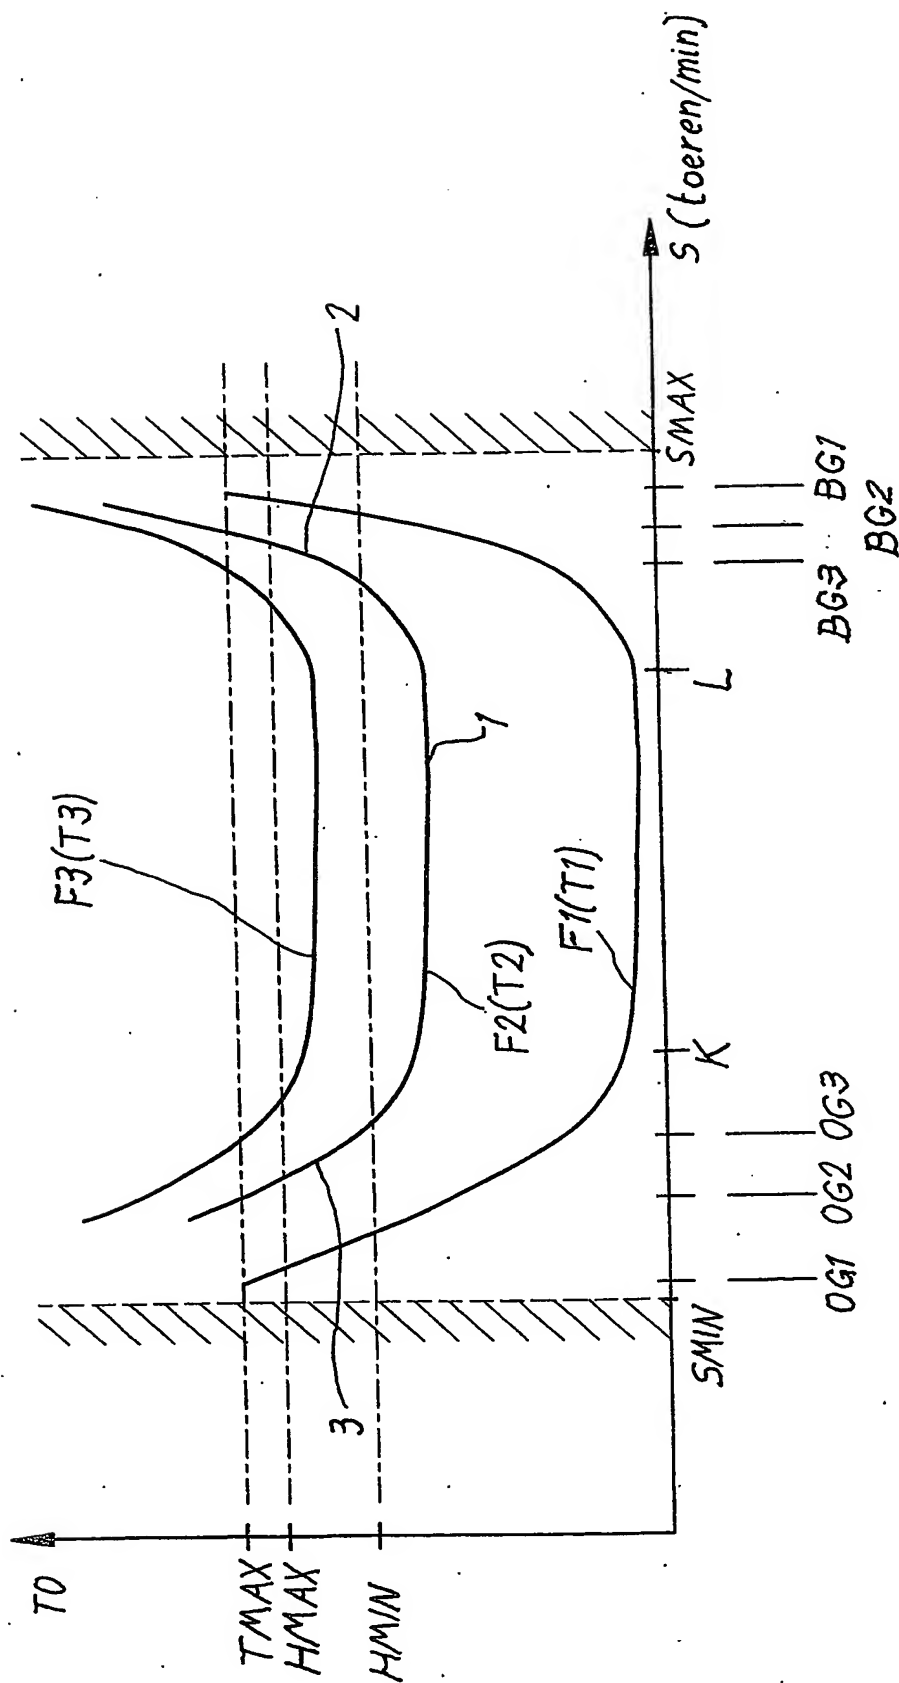


Fig. 1

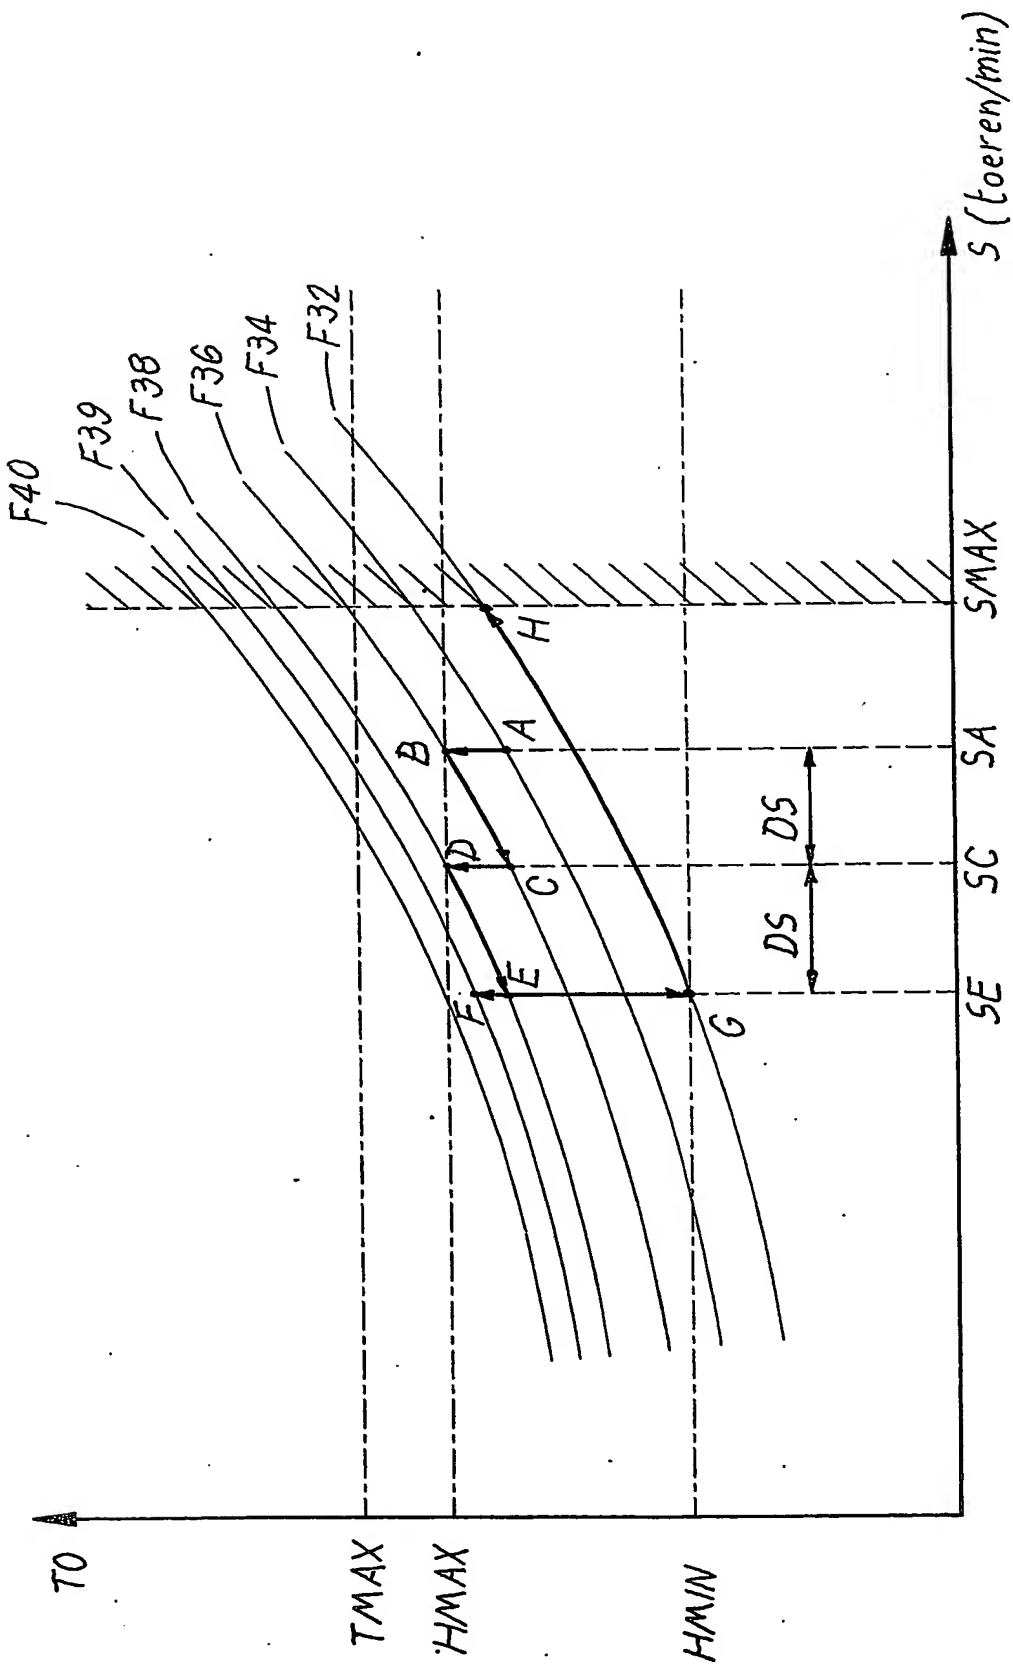
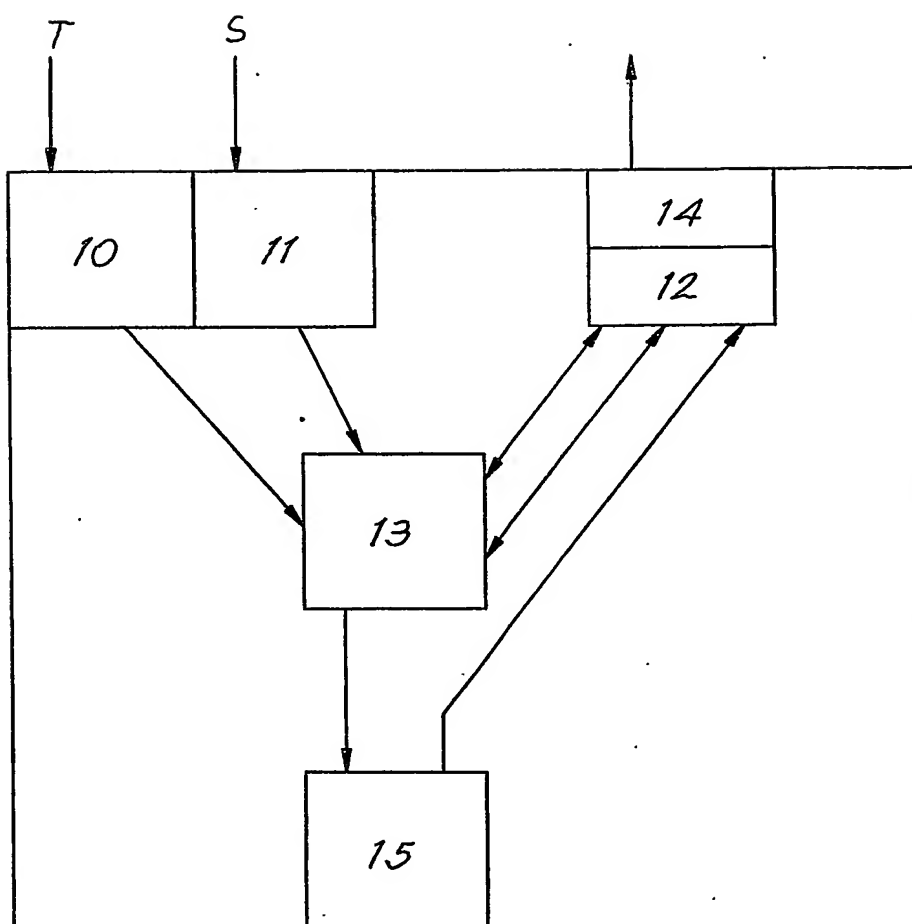


Fig. 2

*Fig.3*

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/BG 03/00130

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F04C29/10

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F04C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	DE 196 49 766 C (NETZSCH-MOHNOPUMPEN) 9 April 1998 (1998-04-09) column 3, line 7 - line 32; figure ---	1
Y	US 5 782 608 A (MCKEE) 21 July 1998 (1998-07-21) column 1, line 38 -column 4, line 9; figures 1-3 ---	1
A	US 2002/088241 A1 (KIMURA KAZUYA ET AL) 11 July 2002 (2002-07-11) page 1, paragraph 3 - paragraph 6 page 2, paragraph 22 - paragraph 26; figures 1,2 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

20 November 2003

Date of mailing of the international search report

27/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Kapoulas, T

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/B.../00130

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19649766	C	09-04-1998	DE 19649766 C1	09-04-1998
			DE 59710030 D1	12-06-2003
			EP 0845598 A1	03-06-1998
US 5782608	A	21-07-1998	NONE	
US 2002088241	A1	11-07-2002	JP 2002202064 A	19-07-2002
			DE 10200378 A1	26-09-2002